




Step 6: After the spacer pin is threaded through and the nylon screw is fastened, tighten the bolt at the bottom of the foot. Tighten only until the foot is snug against the bottom post. The foot still needs to be able to rotate when twisted with slight force.



Step 7: Connect the post cap by placing the bungee under the top rail and the lanyard – connected to the post cap – on top of the top rail. The spacer pin will need to be threaded through the post, bungee, top rail, and lanyard, before finally being secured using the nylon screw. Note that the bungee will just be on one side. The bungee is there to connect to adjacent panels.

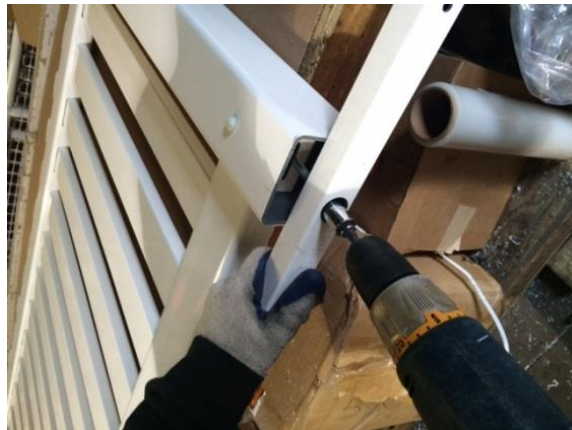

Step 8: Place cap on top of post, move the feet into the correct position, connect bungee to adjacent panel if need be, and you are all set!

